



Electrolux

Modular Cooking Range Line 900XP Electric Bain Marie Top Full module

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



391125 (E9BMEHB000)

Full module electric bain-
marie top

Short Form Specification

Item No.

Incoloy armoured heating elements positioned under the base of the well. Used to keep cooked food at serving temperature using hot water inside the well. Water temperature to be controlled by thermostat with maximum temperature of 90 °C. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Bain Marie used for keeping cooked food at serving temperatures using hot water.
- Incoloy armoured heating elements positioned under the base of the well.
- Knob switch.
- Water basin is seamlessly welded into the top of the appliance.
- Filling water level is plate-marked on the side of the well.
- Unit to feature manual refill of well.
- Water temperature controlled by thermostat with maximum temperature value of 90 °C.
- Basin drained by drain valve with overflow.
- Special insulation beneath cooking surface keeps heat on the plate without dispersion to the base.
- Unit to have perforated false bottom and runner support for GN containers.
- All major compartments located in front of unit for ease of maintenance.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Top configuration allows installation on ambient base only (not possible to install on refrigerated nor freezer base).

Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Optional Accessories

- | | |
|---|--|
| • Junction sealing kit | PNC
206086 <input type="checkbox"/> |
| • Support for bridge type
installation, 800mm | PNC
206137 <input type="checkbox"/> |
| • Support for bridge type
installation, 1000mm | PNC
206138 <input type="checkbox"/> |
| • Support for bridge type
installation, 1200mm | PNC
206139 <input type="checkbox"/> |
| • Support for bridge type
installation, 1400mm | PNC
206140 <input type="checkbox"/> |
| • Support for bridge type
installation, 1600mm | PNC
206141 <input type="checkbox"/> |
| • Chimney upstand, 800mm | PNC
206304 <input type="checkbox"/> |

APPROVAL: _____



Electrolux

Modular Cooking Range Line
900XP Electric Bain Marie Top Full module



Electrolux


**Modular Cooking Range Line
900XP Electric Bain Marie Top Full
module**

- | | |
|---|--|
| • Side handrail-right/left hand (900XP) | PNC 216044
<input type="checkbox"/> |
| • Frontal handrail, 800mm | PNC 216047
<input type="checkbox"/> |
| • Frontal handrail, 1200mm | PNC 216049
<input type="checkbox"/> |
| • Frontal handrail, 1600mm | PNC 216050
<input type="checkbox"/> |
| • Large handrail - portioning shelf, 800mm | PNC 216186
<input type="checkbox"/> |
| • 2 side covering panels for top appliances | PNC 216278
<input type="checkbox"/> |
| • Drilled false bottom full module for bain-marie | PNC 921623
<input type="checkbox"/> |
| • Water filling tap for bain-marie top | PNC 921627
<input type="checkbox"/> |

**Modular Cooking Range Line
900XP Electric Bain Marie Top Full module**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2018.07.17

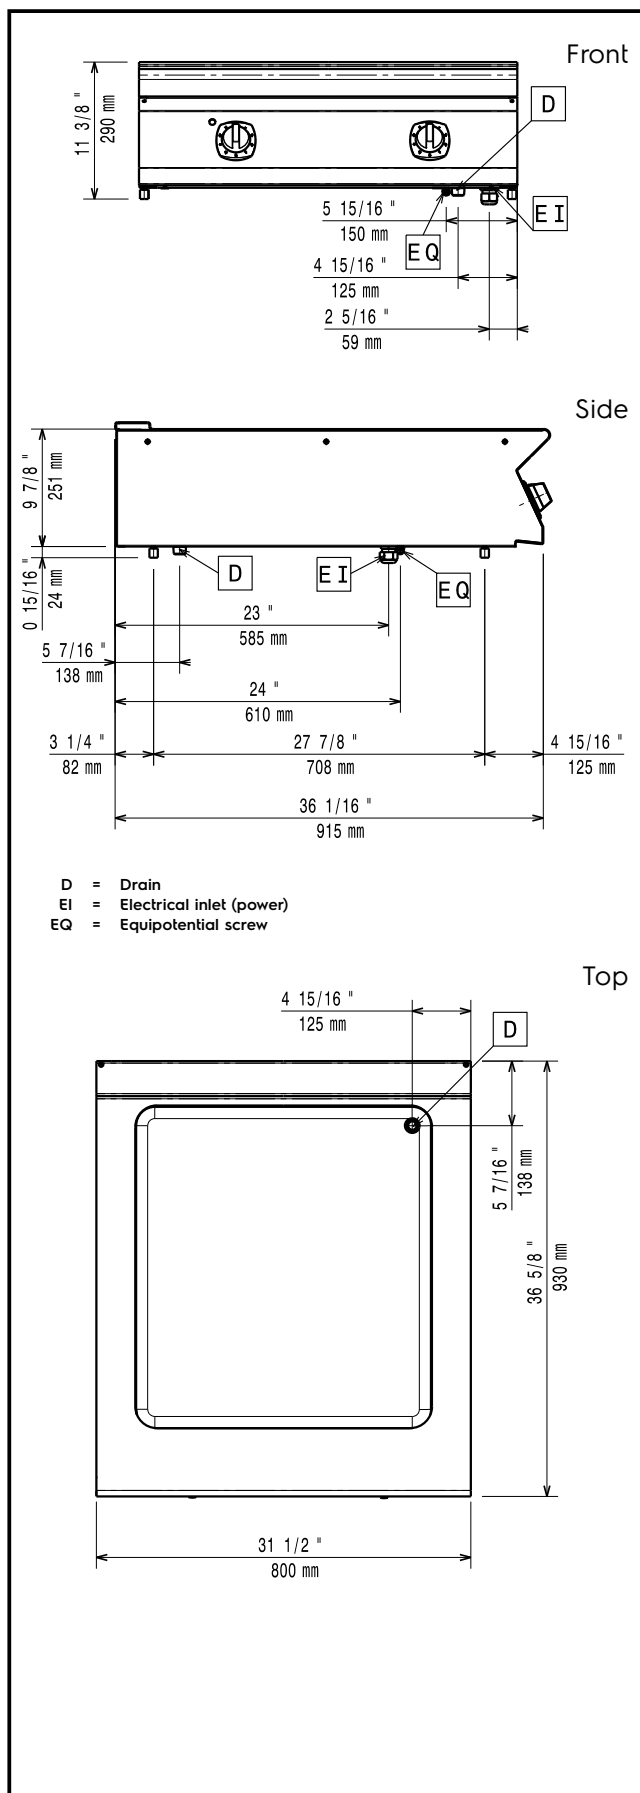

Electric

Supply voltage:	391125 (E9BMEHB000)	380-400 V/2N ph/50/60 Hz
Total Watts:		4.4 kW
Predisposed for:		380-400V 2N~ 50/60Hz
		4-4,4kW

Water:

Water Drain:	50 mm
--------------	-------

Key Information:

Usable well dimensions (width):	630 mm
Usable well dimensions (height):	160 mm
Usable well dimensions (depth):	685 mm
Thermostat Range:	30 °C MIN; 90 °C MAX
Shipping weight:	45 kg
Shipping height:	530 mm
Shipping width:	1010 mm
Shipping depth:	860 mm
Shipping volume:	0.46 m ³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.