

Eraldiseisvad

The new range of appliances developed for the vacuum packing of cooked and raw foods, can provide the highest quality and hygiene in line with every professional kitchen that requires the best conservation standards. The range is designed to satisfy the requirements of users at all levels from small/medium sized restaurants, caterings of 100 to 400 servings per day, speciality food manufacturers and large butcher shops. The models detailed in this sheet are 3 free-standing vacuum packers on wheels.



600047

FEATURES

- Free-standing appliance on wheels.
- Digital control panel allows to select up to 9 operating programs: P1÷P8 are composed of 4 adjustable variables (vacuum, extravacuum, gas and sealing), program P9 "external vacuum" is composed by only 2 variables (vacuum and extra-vacuum). Setting these parameters will guarantee optimized vacuum pressure and heat seal times for any type of product and for each program.
- 2 sealing bars on EVP65 model.

- Pressure chamber with rounded corners to guarantee high levels of hygiene and easy cleaning.
- Electronic board capable of detecting electronic malfunctions, color and level of oil and failures in the vacuum packaging process thus ensuring ease of use and maximum reliability.
- Safety system protects the machine in case of sealing bars overheating.
- Constructed in 304 AISI stainless steel with a domed, transparent plexiglass lid which is suitable for use with food products.
- Electronic soft air device with different speed levels, ensures a controlled re-admission of the air in the sealing chamber (ideal for products with rough edges - available for EVP45 and EVP65


models).

- Model EVP 45 can be equipped with an adapter (available as optional accessory) which allows the vacuum packing process to take place in external containers or appliances by connecting the external container's pipe to the air sucking valve.
- All models comply with the standards required by the main international approval bodies and are CE marked.




600043

600045

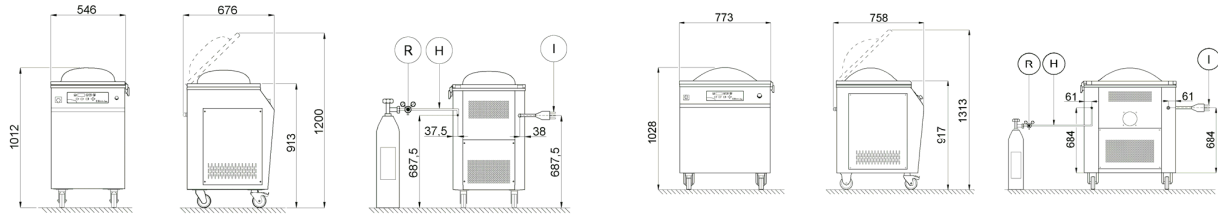

600047

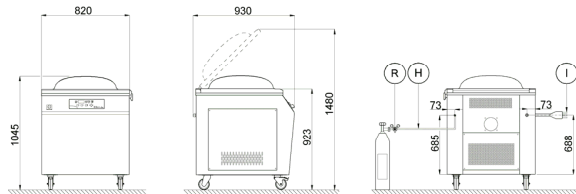

Vaakumpakendajad

Eraidiseisvad

BNAB020

2013-10-03

Võib muutuda ilma etteatamata

	EVP45F 600043	EVP50F 600045	EVP65F 600047
PAIGALDUSJOOIS			
EI - Elektriühendus	220 V, 1N, 50/60	380 V, 3, 50/60	380 V, 3, 50
TEHNILISED ANDMED			
Pump - m ³ /h	20	40	60
Välismõõtmed -mm/laius	550	765	820
Välismõõtmed -mm/sügavus	680	760	930
Välismõõtmed -mm/kõrgus	1013	1030	1050
Elektrivõimsus - kW	1.1	1.5	2.5
Netokaal - kg	101	185	251
LISAVARUSTUS			
ADAPTER VAAKUM.PAK. 6/10/20M3/H	650008		
KALLUT.TÄITMISLAUD-VEDEL.PAKK.20M3/H	650010		
KALLUT.TÄITMISLAUD-VEDEL.PAKK.40M3/H		650011	