



Electrolux

ecostore Premium 1 Door Digital Refrigerator, 670lt (-2 +10)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



727247 (ESP71FR)

Eco Store Premium
Refrigerator - 670 lt 1 Door
(-2/+10)- 230 V/1N/50Hz

727248 (ESP71FRL)

Eco Store Premium
Refrigerator - 670 lt 1 Door
left hinged (-2/+10) - 230
V/1N/50Hz

Short Form Specification

Item No. _____

Full door refrigerator entirely constructed in 304 AISI stainless steel with bottom panel in anti-corrosive material. Large digital display featuring humidity selection button (3 preset level), cabinet temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads). HACCP-compliant control with alarms and history. Frost Watch Control to defrost only when required with automatic evaporation of defrost water. Three probes to constantly monitor the working conditions of the appliance. Optiflow: back to front forced air flow and removable air conveyors provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. On-site reversible door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Built-in refrigeration unit; ventilated operation; Internal LED light. For ambient temperatures up to 43 °C. CFC and HCFC free. R134a gas in refrigeration circuit.

Supplied with n. 4x2/1GN Rilsan coated grids and n. 4 sets of 2 stainless steel grid runners. Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

Main Features

- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Fully compliant HACCP digital control: when temperature exceeds critical limits, acoustic and visual alarms are activated. Up to two months of event are kept in memory.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Optiflow: back to front forced air flow and removable air conveyors provide even temperature distribution and fast cooling in any conditions.
- Frost Watch Control: fully automatic defrost starts only when ice is actually building-up in the evaporator and adapt the defrosting duration to guarantee perfect ice removal while optimizing energy efficiency consumption.
- Improved defrost and evaporator fan management - defrost type changes with temperature set-point: electric below +2°C while air convection defrost above +2°C, thus saving energy.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m*K).
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- Cleaning-free condenser: the structure of the wire frame condenser prevents dust and grease accumulation thus avoiding periodical cleaning operations and reducing energy consumption.
- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Interior LED light to save energy and for best internal visibility.
- Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Rilsan coated grids for improved protection.
- Tropicalized unit (43°C ambient temperature).
- This appliance is intended for use in ambient temperatures up to 40°C.

Construction

- Constructed from the highest quality AISI 304 Stainless steel.
- Interior base with rounded corners, pressed from a single sheet.
- The rounded internal corners, the easily removable runners, grids and air conveyors allow for ease of

APPROVAL: _____



Electrolux

ecostore Premium
1 Door Digital Refrigerator, 670lt (-2 +10)

cleaning and high hygiene standards.

- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Easy access to the main components for maintenance.
- Lockable door.
- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- Refrigerant type: R134a.
- CFC and HCFC-free insulation.


Included Accessories

- 4 of 2/1GN grey rilsan grid with 2 runners PNC 881020


Optional Accessories

- Grids support with 50 positions for ecostore Touch and ecostore Premium cabinets ☐ PNC 880237
- 2 stainless steel runners for refrigerated cabinets - (Marine) ☐ PNC 880242
- Set of 8 GNI/1 PVC containers for fish ☐ PNC 880243
- Spacer for 670 lt and 1430 lt refrigerated cabinets ☐ PNC 880248
- Pedal opening for cabinets ☐ PNC 880324
- 1/1GN plastic container with false bottom ☐ PNC 880705
- 4 swivelling wheels (2 with brake) for refrigerators, diam 125 mm, NOT for Glass Door and remote models ☐ PNC 881002
- Kit of 10 pairs of runners and 4 tray supports to fit pastry trays (400x600mm) ☐ PNC 881003
- 2/1GN grey rilsan grid ☐ PNC 881004
- 2/1GN aisi 304 stainless steel grid ☐ PNC 881016
- 2/1GN 304 AISI stainless steel grid with 2 runners ☐ PNC 881018
- Meat rail for 670/1430lt refrigerators with 4 hooks ☐ PNC 881019
- Set of 2 stainless steel runners for 670/1430lt refrigerators and freezers ☐ PNC 881021
- 2/1GN pvc container with lid and 2 runners ☐ PNC 881039
- 2/1GN perforated shelf ☐ PNC 881042
- 1/1GN rilsan steel wire basket h=150mm ☐ PNC 881043
- 2/1GN grey rilsan basket+2 runners h=150mm ☐ PNC 881047

Front

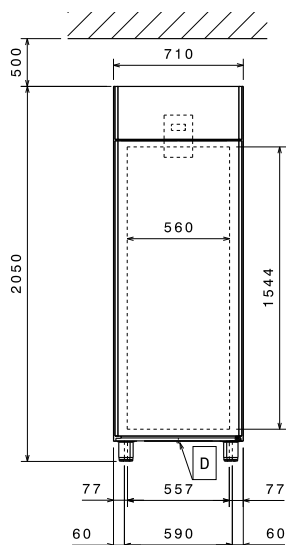


Side

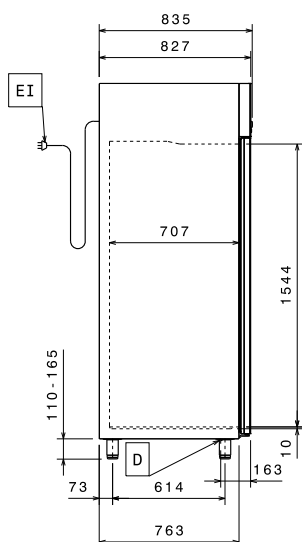

EI = Electrical inlet (power)
 RI = Refrigerant Inlet
 RO = Refrigerant Outlet

Top



Electric

Supply voltage:

727247 (ESP71FR) 220-230 V/1 ph/50 Hz

727248 (ESP71FRL) 220-230 V/1 ph/50 Hz

Electrical power max.:

0.23 kW

Key Information:

Gross capacity: 670 lt

Net Volume: 503 lt

Door hinges:

727247 (ESP71FR) Right Side

727248 (ESP71FRL) Left Side

External dimensions, Width: 710 mm

External dimensions, Height: 2050 mm

External dimensions, Depth: 835 mm

External dimensions, Depth with Doors Open: 1480 mm

Number and type of doors: 1 Full

Number and type of grids (included): 4 - GN 2/1

Type of external material: 304 AISI

Type of internal material: 304 AISI

Internal panels material: 304 AISI

Number of positions & pitch: 44; 30 mm

Refrigeration Data

Control type: Digital

Compressor power: 1/4 hp

Refrigerant type: R134a

Refrigeration power: 358 W

Refrigeration power at evaporation temperature: -10 °C

Refrigerant weight: 130 g

Operating temperature min.: -2 °C

Operating temperature max.: 10 °C

Operating mode: Ventilated

Product Information (EU Regulation 2015/1094)

Energy Class: D

Yearly and daily energy consumption: 755kWh/year - 2.07kWh/24h

Climate class: Heavy Duty (5)



Energy Efficiency Index (EEI): 52,59

Type of model: vertical chilled



Electrolux

ecostore Premium
1 Door Digital Refrigerator, 670lt
(-2 +10)

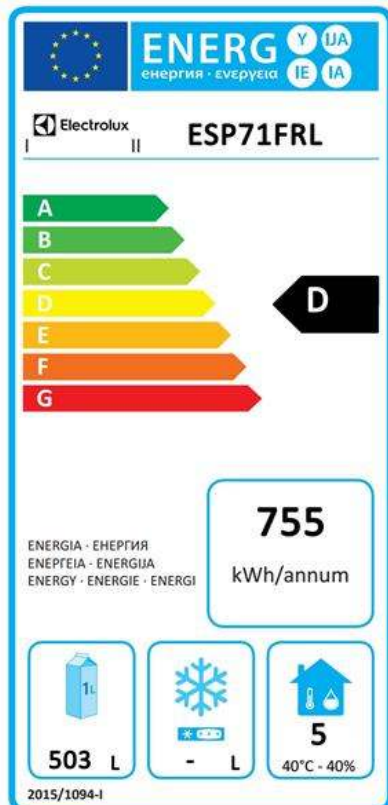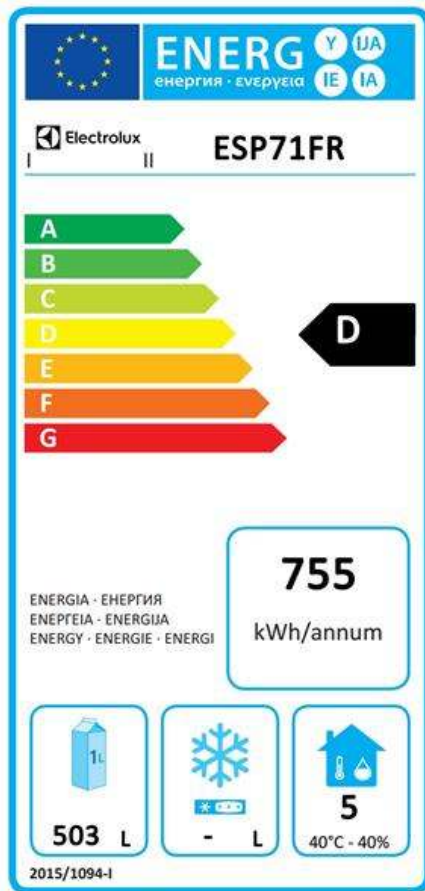

ecostore Premium
1 Door Digital Refrigerator, 670lt (-2 +10)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2019.01.14

EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.